

SOLAR DISPLAY SYSTEMS

Eco-Vision products use the latest in solar cell technology to provide off-grid illumination within noticeboards, poster cases, wayfinding displays and corporate signage.

KEY FEATURES:

- 24hr visibility in any location
- Intelligent 'on-demand' lighting
- Top-lit or back-lit display area
- No need to route mains power
- Maintenance free illumination
- 50,000 hours use
- Environmentally friendly
- Key locks
- Integrated audio recordings
- Highly robust aluminium profiles
- Weather and vandal resistant
- Integrated weather shield
- Smooth continuous hinges

POPULAR USES:

- Directional sign
- Information sign
- Map interpretation
- Dusk and evening lighting

IDEAL LOCATIONS:

- Town centres and parks
- Cycle and coastal paths
- Golf and hotel driveways
- Remote car parks and train station platforms
- Busy high streets and pedestrianised areas



Display Sizes:


- 624mm x 890mm -A1P/A1L
- 890mm x 1238mm -A0P/A0L
- 2 x 455mm x 624mm -A2P x2
- 2 x 624mm x 890mm -A1P x2
- 3 x 455mm x 624mm -A2P x3

Eco-Vision Formats:

- Single and double door
- Wall and post mounted
- Noticeboard
- Totem

Optional Extras:

- Thumb locks
- Gas struts if top hinged door
- 90mm round or 80mm square posts
- Monopole ball post finials
- Ornate posts includes ball finials and embellishments
- External ARC, ABL, CRD header panel
- Flat external header or footer panel
- Internal back-lit, printed header, 100mm high
- Internal back-lit, fret cut vinyl header, 100mm high
- Vinyl text on glazing or external header
- Printed logo or digital print on glazing or external header

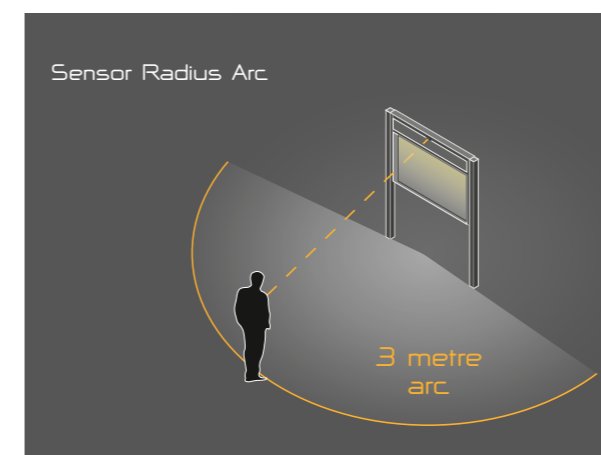

Insert Options:

- Pinboard
 - Premium felt
 - Brushed loop nylon
 - Tricord
- Coloured magnetic board

Frame Finishes:

- Textured silver
- Antique bronze
- Antique pewter
- Standard powder coated finishes

Specification Detail:

- Frame: 6063T6 and 6082T6 grade aluminium
- Glazing: 4mm hi-impact acrylic
- Gas struts: Included on A0L
- Core: Magnetic panel or 8mm pinboard
- Insert to glazing: S/sided 95mm boards, d/sided and monolith style 150mm boards
- Fire rating: Exterior surfaces to BS-476 Class 1
- Locks: Integrated proprietary locks with 2 keys
- Illumination: LED top illumination as standard, edge-lit LED illumination, back-lit effect on request
- Posts, finials and headers: 80x80x3000mm D-shape posts match the frame finish as standard. 90mm round, 80mm square or 90mm ornate post option
- Back panel: Magnetic panels have powder coated zintec, other inserts have powder coated aluminium back, wall mounted has mill finish aluminium